




### 1. Dimensions:

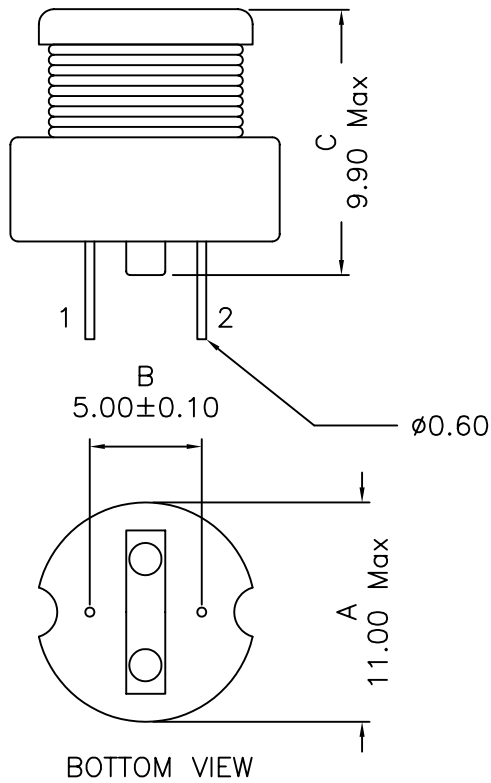

### 2. Schematic:



### 3. Electrical Specs:

OCL: 1500uH ± 10% @ 100KHz 0.25V, 0Adc  
 OCL: 1500uH ± 20% @ 100KHz 0.25V, 0.25Adc  
 DC Res.: 4.4 ± 10% Ohms

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temp: -40°C to +85°C
6. Storage Temp: -55°C to +125°C

DOC REV: A/3

<b>XFMRs Inc</b>	Title: Inductor		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.25 Dimensions in MM	P/N: 1XF00152T1M	REV A
	DWN.	罗振江	Sep-09-03
	CHK.	廖玉坤	Sep-09-03
Scale 2.5:1 SHT 1 OF 1	APP.	Isaiah M	Sep-09-03