



### 1. Mechanical Dimensions:

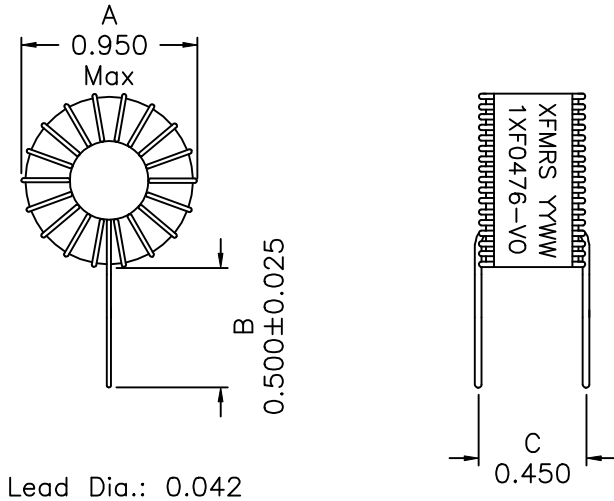

### 2. Schematic:



### 3. Electrical Specifications:

Inductance: 47.0uH±15% @10KHz, 100mV

Inductance: 29.3uH±15% @10KHz, 100mV, 6.7Adc

Saturation Current: 6.7Adc

DCR: 0.024 Ohms Max

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: -40°C to +85°C

DOC. REV. A/1

<b>XFMRS Inc.</b>	Title: <b>VERTICAL INDUCTOR</b>		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch		P/N: 1XFO476-VO
	DWN.	廖玉坤	Apr-30-03
	CHK.	李清儿	Apr-30-03
	APP.	BW	Apr-30-03