



1. Mechanical Dimensions:

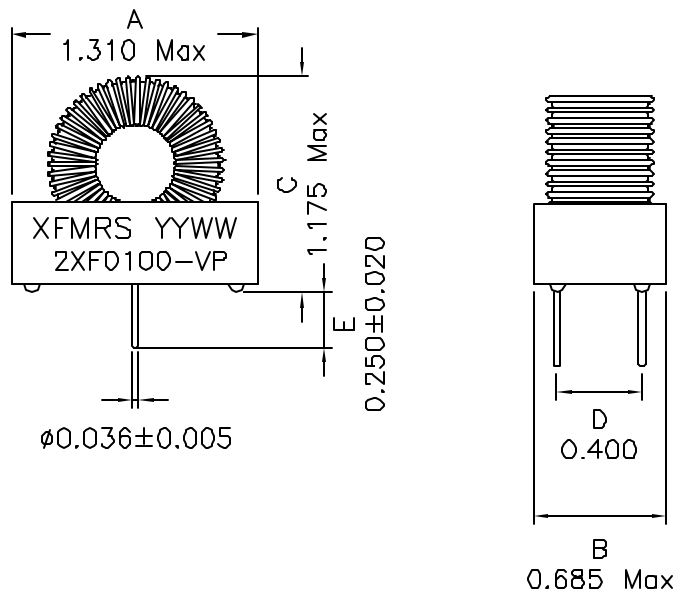

2. Schematic:



3. Electrical Specifications:

Inductance: 100uH±10% @10KHz 0.1V, 0Adc
 Inductance: 76.5uH Min @10KHz 0.1V, 3Adc
 DC Resistance: 0.050 Ohms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 206H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/3

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc. www.XFMRS.com	Title: Toroid Inductor		
	UNLESS OTHERWISE SPECIFIED	P/N: 2XF0100-VP	REV. A
TOLERANCES:	DWN.	Kang Chen	Apr-25-07
.xxx ±0.010	CHK.	YK Liao	Apr-25-07
Dimensions in Inch	APP.	MS	Apr-25-07
SHEET 1 OF 1			