

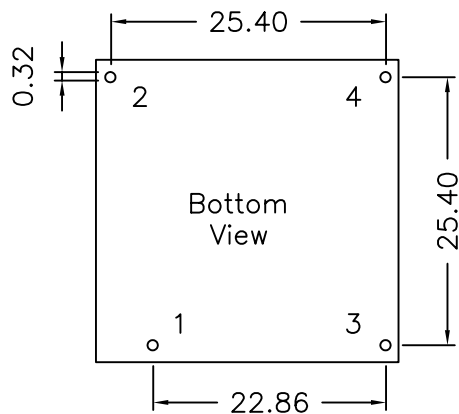
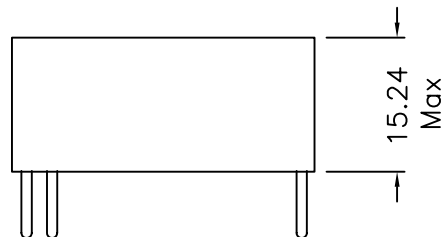


1. Mechanical Dimensions:

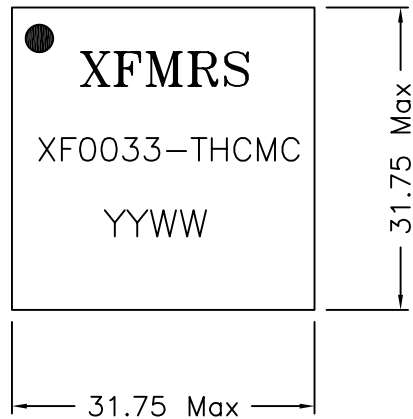

2. Schematic:

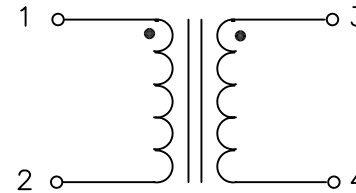

3. Electrical Specification:

OCL: 3mH Min @1KHz 80mV

Leakage Inductance: 35uH Min @130KHz, 500mV

DCR: 0.060 Ohms Max Each Wdg.

Rated Current (For 40°C Rise Max): 3.5Arms

HYPOT: 1250Vac Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -30°C to +130°C
6. Storage Temperature Range: -55°C to +130°C
7. Aqueous wash compatible

XFMRS Inc.	Title: Common Mode Choke	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0033-THCMC	REV. A
	DWN.	李清儿 May-31-01
	CHK.	孙小忠 May-31-01
SHEET 1 OF 1	APP.	Isaiah M May-31-01

Doc Rev: A/1