



1. Dimensions:

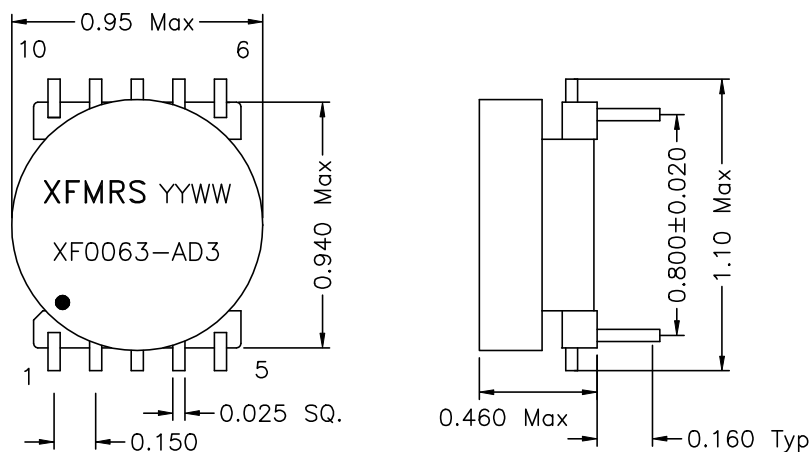

2. Schematic:



3. Electrical Specifications: @25°C

ISOLATION VOLTAGE: 1500Vrms

OCL: Pins 1-5 6.0mH ± 5% @1KHz 1V 0mADC

OCL: Pins 1-5 6.0mH ± 10% @1KHz 1V 100mADC

DC Res.: Pins 1-5 4.0 Ohms Max

DC Res.: Pins 6-10 4.0 Ohms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC. REV A/3

XFMR5 Inc	Title: ADSL Coupled Inductor		
	UNLESS OTHERWISE SPECIFIED		P/N: XF0063-AD3
	TOLERANCES:		REV. A
	.xxx ± 0.010		
Dimensions in INCH	DWN.	李清儿	Jun-15-01
	CHK.	孙小松	Jun-15-01
SHEET 1 OF 1	APP.	Joe Huff	Jun-15-01