
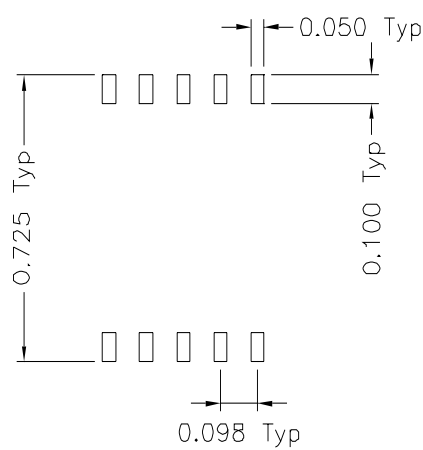


1. Mechanical Dimensions:

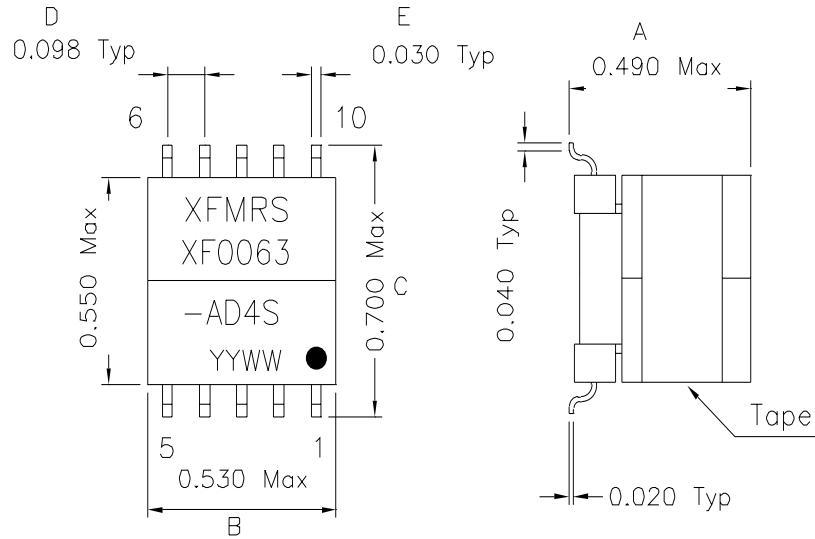


Suggested PCB Layout

Note: Designed to meet UL1950 for supplementary insulation, 250 working volts.

DOC. REV: A/1

2. Schematic:

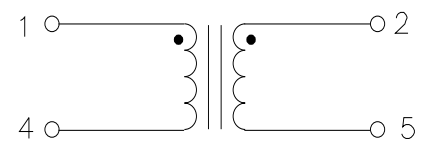

3. Electrical Specifications:

- Turns Ratio: 1-4:2-5 1:1
- Isolation Voltage: 850VAC
- OCL: P1-4 5.5mH±10% 10KHz 0.1V 0/160mAdc
- DC Res.: 1-4 4.75 Ohms±15%
- 2-5 4.75 Ohms ±15%
- Resonant Frequency: 220KHz Min

XFMRs Inc	Title: ADSL Inductor		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH		Scale 1.5:1 SHT 1 OF 1
P/N: XF0063-AD4S	REV. A		
DWN.	李清儿	Aug-10-99	
CHK.	孙悦	Aug-10-99	
APP.	Joe Huff	Aug-10-99	