



**Dimensions:**

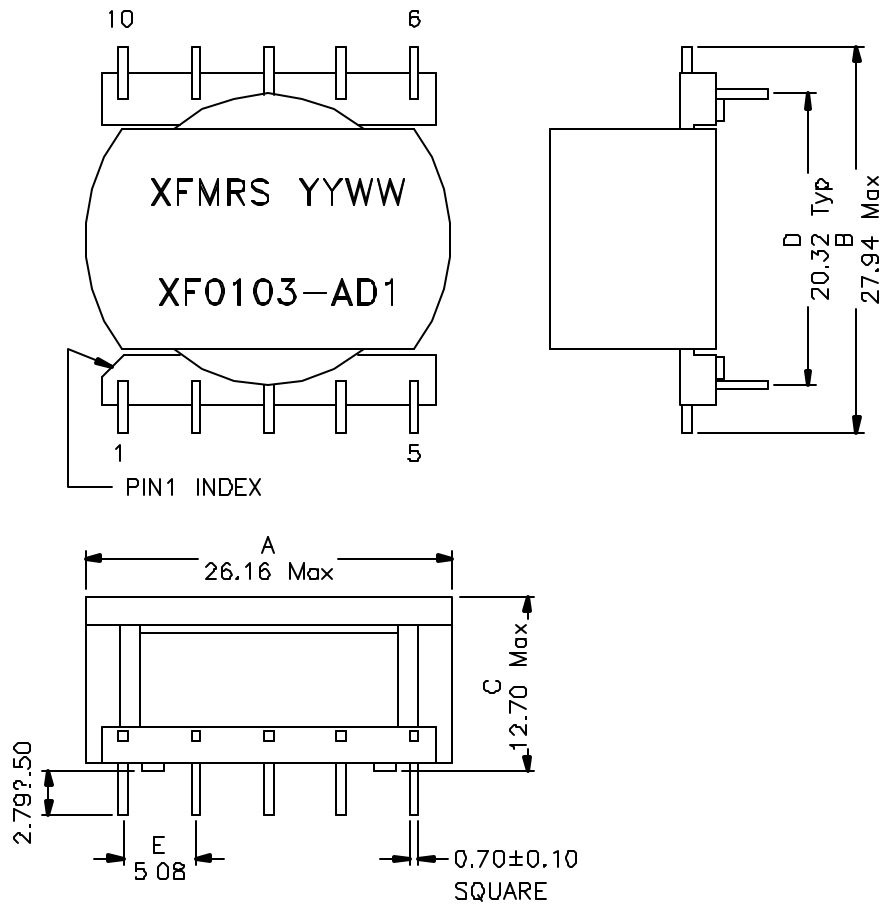

**Schematic:**



**Electrical Specifications: @25°C**

- HIPOT: 1500VAC between windings
- OCL: 10mH±5% @1KHz 1V 0mA to 100mA (each winding)
- DCR: 4.50 Ohms Max (each winding)

**Note:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

DOC. REV. A/1

<b>XFMRs Inc</b>	Title: COMMON MODE CHOKES		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0103-AD1	REV. A
TOLERANCES: x.xx ±0.25	DWN.	李小锋	Jun-15-01
Dimensions in MM	CHK.	廖玉坤	Jun-15-01
SHEET 1 OF 1	APP.	BW	Jun-15-01