


1. Mechanical Dimensions:

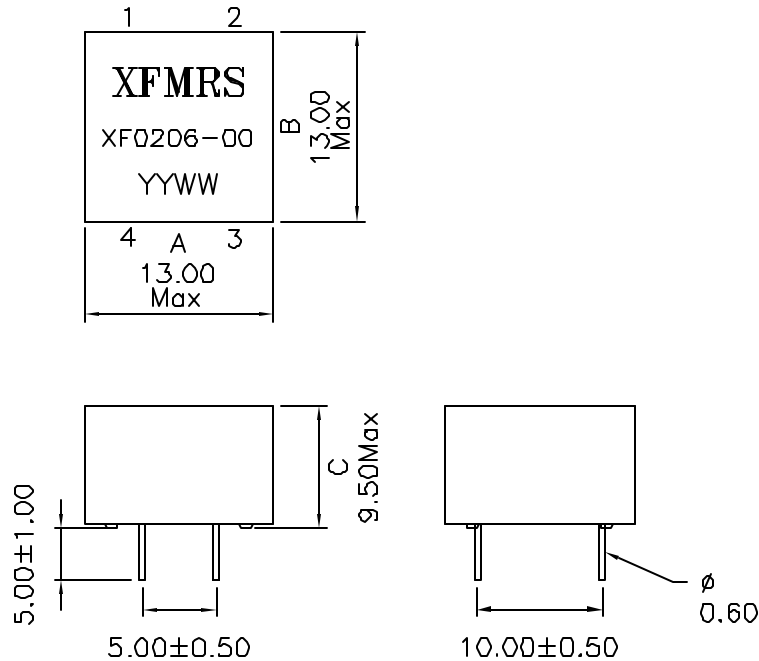


Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV A/7

2. Schematic:

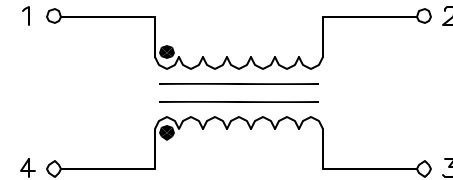

3. Electrical Specifications: @25°C

- OCL: 20uH Min @100KHz 0.1V each winding
- DC Resistance: 0.030 ohm Max each winding
- Turns Ratio: 1:1±5%
- HIPOT: 500Vrms
- Rated Current: 3A
- Rated Voltage: 65VDC
- Insulation Resistance: 10M ohm Min

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com		Title: Common Mode Choke	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM		P/N: XFO206-00	REV A
SHEET 1 OF 1		DWN. 廖玉坤	Mar-10-06
		CHK. 李清儿	Mar-10-06
		APP. MS	Mar-10-06