


1. Mechanical Dimensions:

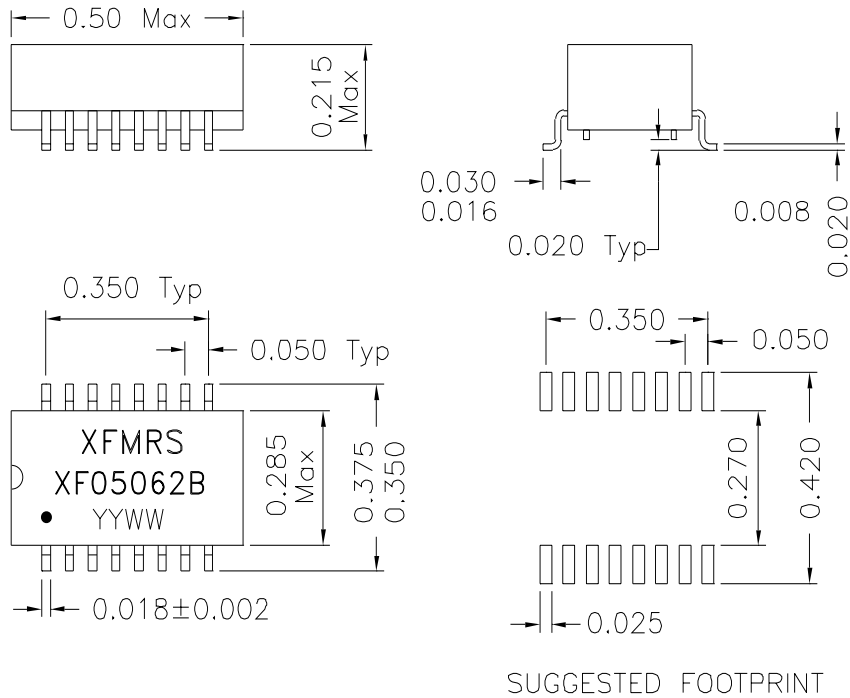

3. Electrical Specifications: @25°C

PRI/SEC Isolation: 1500Vrms

Turns Ratio: (1-2-3):(16-15-14) 1CT:2CT±2%

Turns Ratio: (6-7-8):(11-10-9) 1CT:1CT±2%

OCL(1-2): 50uH Min @100KHz 50mV

OCL(11-9): 200uH Min @100KHz 50mV

Cw/w: 20pF Max @100KHz 50mV (Pri/Sec)


Leakage L: 0.30uH Max @ 100KHz 50mV

Pri/Sec DC Res.: 1.00 Ohms Max

PRI/SEC Cw/w: 10pF Max @100KHz 50mV

CHOKE OCL: 30uH Typ @100KHz 50mV

2. Schematics:

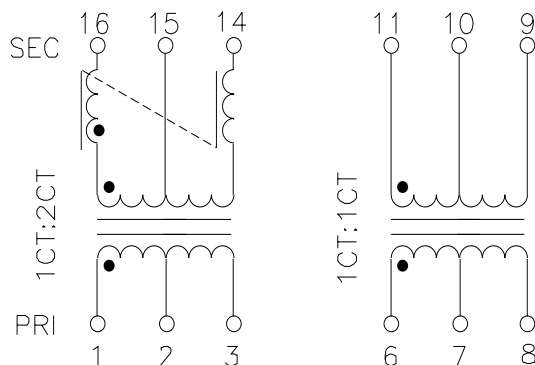

DOC. REV A/1

XFMRs Inc	Title: 10 BASE T Magnetics		
	UNLESS OTHERWISE SPECIFIED	P/N: XF05062B	REV. A
	TOLERANCES:	DWN.	李清儿 Aug-08-97
	.xxx ±0.010	CHK.	孙怡 Aug-08-97
Dimensions in INCH	APP.	Joe Huff Aug-08-97	
SCALE 2.5:1 SHT 1 OF 1			