


XFMRS


XFEB160808 SERIES CHIP BEADS

- * TAPE AND REEL PACKAGING FOR HIGH VOLUME MANUFACTURING
4000 PCS PER 7" REEL
- * FOR DC/DC CONVERTERS, DC/AC INVERTERS, VRM APPLICATIONS
- * TEMP. RISE; 15°C TYPICAL ABOVE 60°C AMBIENT
- * OPERATING TEMP.: -40°C TO +125°C
- * RoHS Compliant

Mechanical Dimensions:

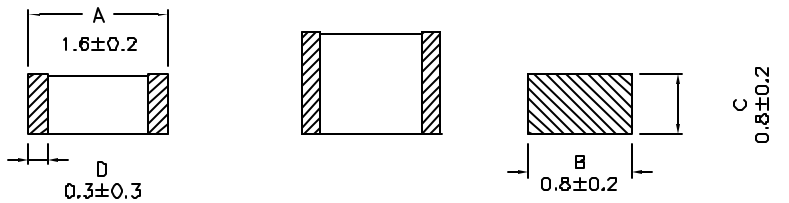

Schematic:



Part Number	IMPEDANCE (Ohms)	Test Frequency (MHz)	RDC Max (Ohms)	IDC Max (mA)
XFEB160808-300	30 ± 25%	100	0.20	200
XFEB160808-400	40 ± 25%	100	0.20	200
XFEB160808-600	60 ± 25%	100	0.20	200
XFEB160808-800	80 ± 25%	100	0.30	200
XFEB160808-121	120 ± 25%	100	0.30	200
XFEB160808-221	220 ± 25%	100	0.50	100
XFEB160808-301	300 ± 25%	100	0.60	100
XFEB160808-451	450 ± 25%	100	0.70	100
XFEB160808-601	600 ± 25%	100	0.80	100
XFEB160808-751	750 ± 25%	100	1.00	100
XFEB160808-102	1000 ± 25%	100	1.00	100

Graphs

