
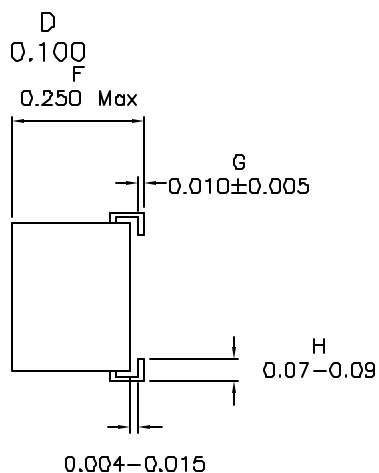



1. Mechanical Dimensions:

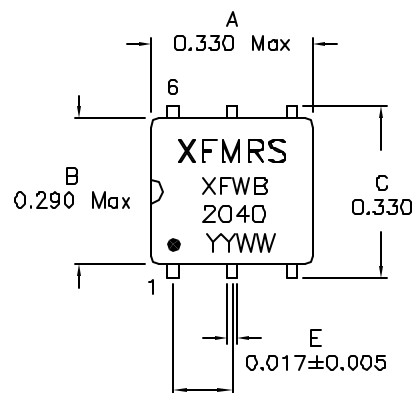

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -40°C to +85°C

2. Schematic:

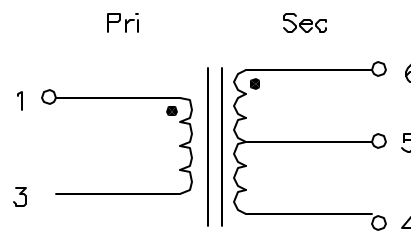

3. Electrical Specifications:

Impedance Ratio: Pri:Sec 1:4 $\pm 2\%$
 Insertion Loss: 0.80-250MHz 1dB Typ
 Insertion Loss: 0.25-350MHz 2dB Typ
 Insertion Loss: 0.15-400MHz 3dB Typ
 OCL: P1-3 25 μ H Min @100KHz, 50mV
 RDC: P1-3 0.115 Ohms Max
 OCL: P6-4 95 μ H Min @100KHz, 50mV
 RDC: P6-4 0.16 Ohms Max

PRELIMINARY

DOC. REV. A/2

XFMRS Inc UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.010 Dimensions in Inch	Title: RF TRANSFORMER	
	P/N: XFWB2040	REV. A
	DWN. 李小锋	Jun-25-02
	CHK. 廖玉坤	Jun-25-02
SHEET 1 OF 1	APP. Isaiah M	Jun-25-02

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION