



1. Mechanical:

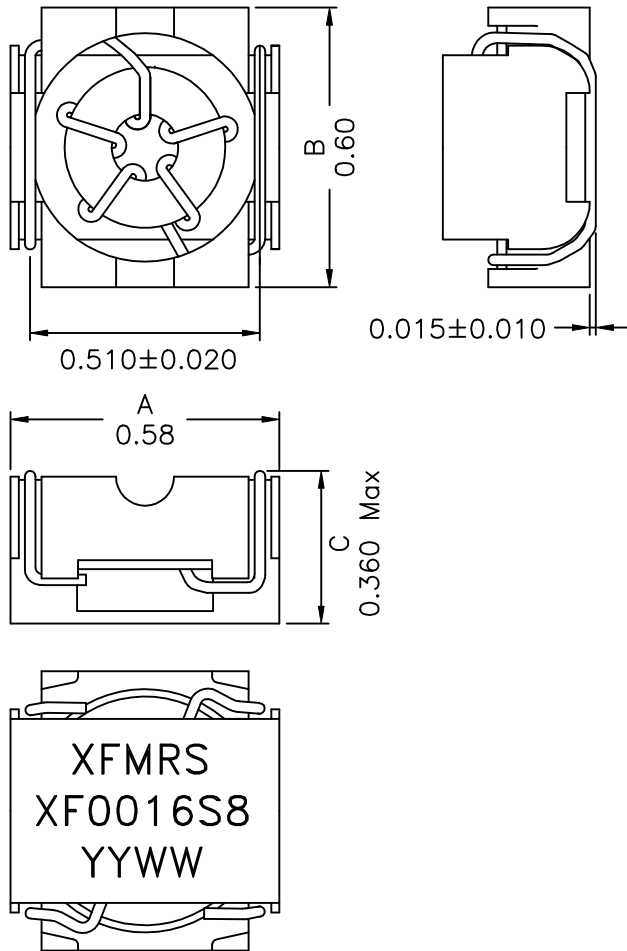

2. Schematic:



3. Electrical Specifications: @25°C

DC Resistance: 0.008 ohms Maximum
 OCL: 1.25uH TYPICAL @1KHz 1.0V
 OCL: 1.0uH Min @1KHz 1.0V 10ADC

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -40°C to +85°C
6. NO VARNISH REQUIRED

DOC. REV A/5

XFMR INC	Title: Surface Mount Inductor		
	UNLESS OTHERWISE SPECIFIED		P/N: XF0016S8
TOLERANCES: .xx ±0.025		DWN.	廖玉坤
Dimensions in inch		CHK.	李清儿
SHEET 1 OF 1		APP.	Joe Huff
			REV. A
			Mar-04-01
			Mar-04-01
			Mar-04-01