
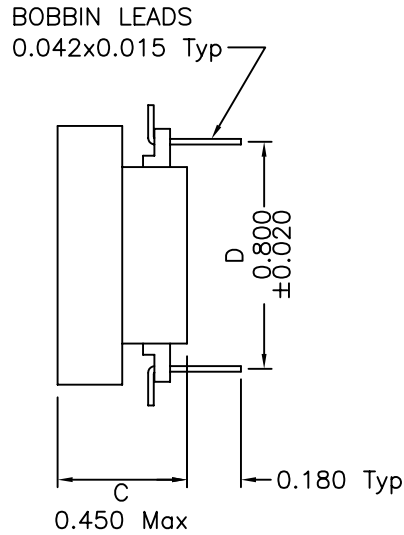


1. Dimensions:

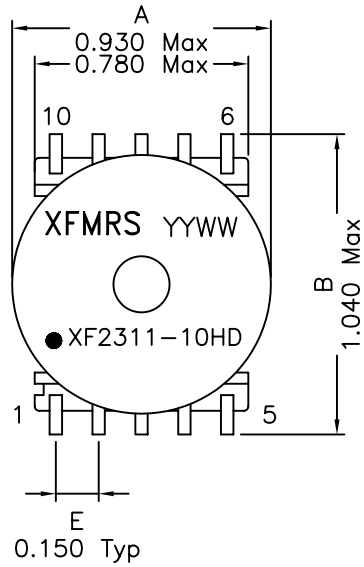

3. Electrical Specifications: @25°C

Turns Ratio: (4-2):(10-8-6)=1:1.8ct±1%

Inductance: Pins 10-6 11.7mH±10% @10KHz 100mV

DC CURRENT CAPABILITY: 160mA

DCR: Pins 10-6 4.10 Ohms±15%


DCR: Pins 4-2 2.30 Ohms±15%

Leakage L: Pins 10-6 65uH Max @100KHz, 100mV

Cw/w: Pins 4-10 65pF Max @100KHz, 100mV

ISOLATION VOLTAGE: 1500Vrms (Chip-Line)

2. Schematic:

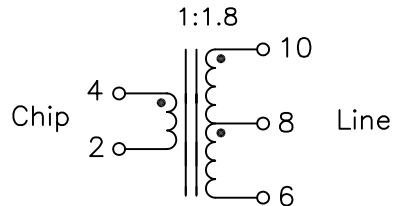

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

DOC. REV A/2

XFMRs Inc		Title: HDSL TRANSFORMER	
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N: XF2311-10HD	REV. A
.xxx ±0.010		DWN.	廖玉坤
Dimensions in INCH		CHK.	李清儿
SHEET 1 OF 1		APP.	BW
			Mar-24-01
			Mar-24-01
			Mar-24-01