



### 1. Dimensions:

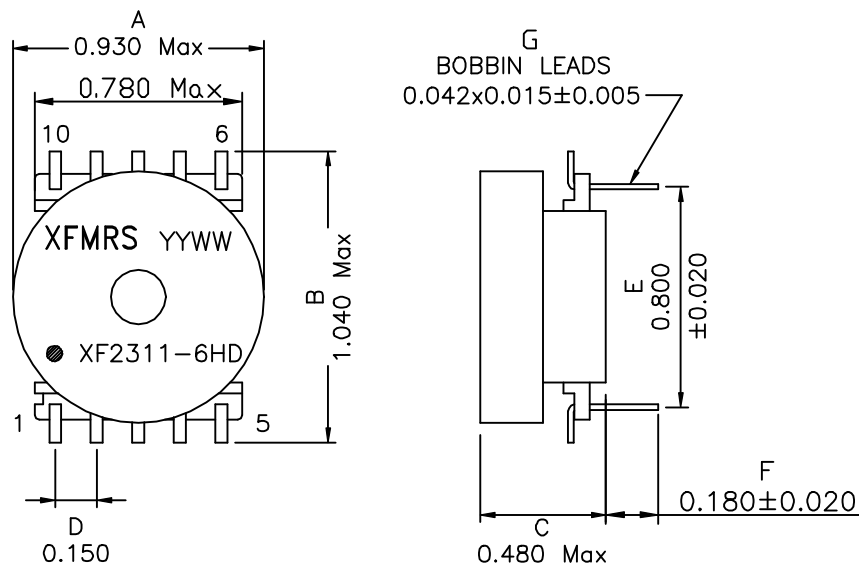

### 2.Schematic:



### 3.Electrical Specifications: @25°C

ISOLATION VOLTAGE: 1500Vrms  
 TURNS RATIO: (2-3-4):(7-6):(10-9)=1CT:0.9:0.9 ±2%  
 PIN6-10 Inductance: 2.06mH ±10% @10KHz 1.0V  
 (CONNECT PIN7-9)  
 DC CURRENT CAPABILITY: 75mA  
 DCR: 2.0 ohms Max. (6-7), (9-10)  
 2.0 ohms Max. (2-4)  
 RETURN LOSS: 16.5dB Min. @40-320KHz  
 Longitudinal Balance (135 ohms): 50dB Min @5-292KHz  
 THD: 75dB Typ. @5KHz 6vp-p 135 ohms

Notes:

- Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Temperature rating: 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

DOC. REV A/5

<b>XFMRS Inc</b>	Title: HDSL TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED	P/N: XF2311-6HD	REV. A
TOLERANCES:	DWN.	廖玉坤	Dec-03-01
.xxx ±0.010	CHK.	李清儿	Dec-03-01
Dimensions in INCH	APP.	Joe Huff	Dec-03-01
SHEET 1 OF 1			